

•			
•		- 40... +180 °C	
•		± 0.01 a <sub>w</sub>	
•	(± 1 %RS)		
•	HUMICAP®		
		20	
•	RTU	RS-485	Modbus®
•		1	6
•	PC	Indigo	Insight

HUMICAP®  
HUMICAP®

MMP8

HUMICAP®

MMP8  
180L2

HUMICAP®  
20

MMP8  
ppm

MMP8  
ppm

HUMICAP® 180L2

MMP8

1/2

NPT 1/2

ISO  
MMP8

Indigo

Insight PC

[www.vaisala.com/insight](http://www.vaisala.com/insight)  
[www.vaisala.com/indigo](http://www.vaisala.com/indigo)

MMP8  
(a<sub>w</sub>)


(%RS)

(T)

EMC (2014/30/EU)  
RoHS (2011/65/EU) 2015/863

	0 ... 1 a <sub>w</sub>
T <sub>90</sub> 1)	10
	HUMICAP® 180L2
2)	± 0.01 a <sub>w</sub> (± 1 % RS)
	10%
	- 40 ... +180 °C
+20 °C	± 0.2 °C

1) +20 °C  
2) 0 ... 0.5 a<sub>w</sub>

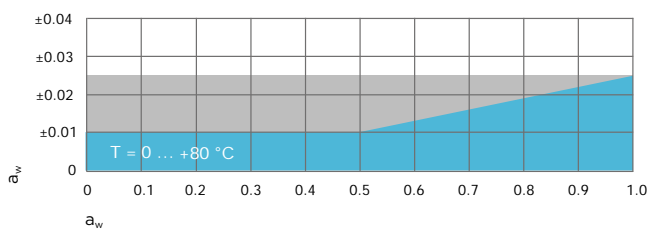


MMP8 A<sub>w</sub>

	- 40 ... +180 °C
	- 40 ... +80 °C
	- 40 ... +80 °C
	0 ... 40 bar
	10 bar
IP	IP66
	+120 °C
	40 bar
	15 ... 30 VDC
	10 mA
	RS-485
	Modbus RTU
	(%RS)
	(°C)
	(ppm <sub>v</sub> )

EMC	EN 61326-1
	DNV GL TAA00002YT
	CE, RoHS, RCM



	M125 A
	510g
	> 1 m/s
	2 m
	35 ... 179 mm
	AISI 316L
	AISI 316L
	FEP



MMP8

	ISO 1/2	-1
	ISO 1/2	- -2
ISO 3/4		
Indigo USB 1)		USB2
1)	<a href="http://www.vaisala.com/insight">www.vaisala.com/insight</a>	Windows Insight